


Strobe Light and Horn

Series ADS-GLD-AL

The Series ADS-GLD-AL Strobe Light with horn is mounted to a weatherproof cast surface mounting box. The horn can produce 1 of 8 tones selected internally with a dip switch, decibel levels range from 87 to 99dB depending on tone selected.

Features:

- Heavy duty cast box.
- Strobe has fresnel optic lens, which provides a uniform 360 degree light pattern,
- 1.75 joule energy flash.
- Strobe produces 60-80 flashes per minute.
- Horn db/volume listed is measured at 10'.
- The Strobe and Horn have independent power inputs so they may be controlled separately if desired.
- Impact resistant polycarbonate lens and base, cast box allows flat surface and 1/2" NPT internal hub pipe mounting

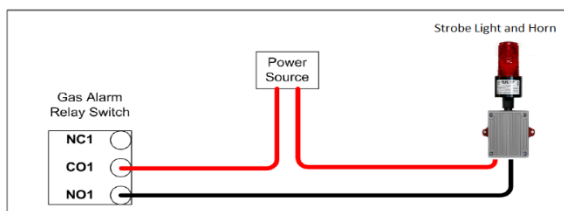

Specifications:

- **Voltage available:** 120 VAC or 12/24 VDC version
- **Operating Current:** ..12A @120Vac
- **Temperature Range:** -35C to 66C
- **Flash Rate/ Minute:** 60-80
- **Candlepower Peak:** 1.75 joule energy flash
- **Listings:** U.L.
- **Mounting:** 1/2" NPT Pipe or surface mount
- **Flash tube life:** Several thousand hours, and is replaceable
- **Weather resistant--indoor/outdoor use**
- **Dome Guard:** N/A
- **Audible Output:** 87-99dBA @ 10'
- **Lens Color Options:** Red, Amber, Blue, Green, Clear